


Kołnierze

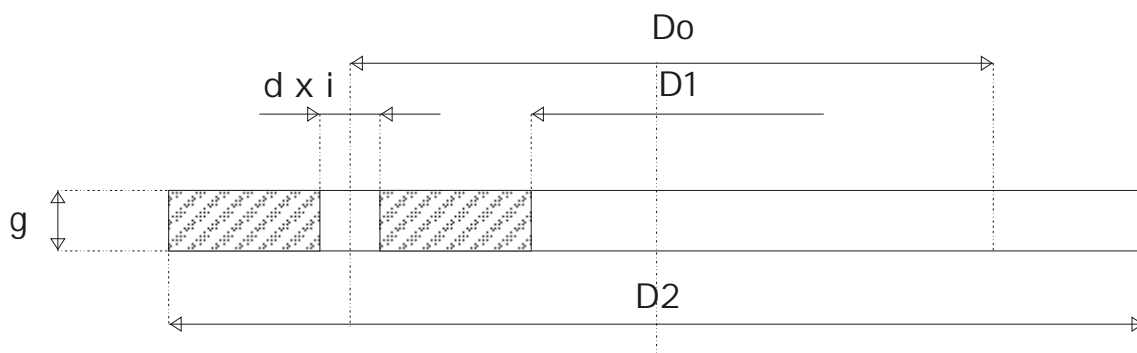

D1	D2	d x i *	g	Do
mm	mm	mm x szt.	mm.	mm.
125	165	7x4	5-4	145
150	190	7x4	5-4	170
160	200	7x4	5-4	180
180	220	7x4	5-4	200
200	240	7x6	5-4	220
225	275	9x6	5	250
250	300	9x6	5	275
280	330	9x6	5	305
300	350	9x6	5	325
315	365	9x8	5	340
350	410	9x8	5	380
400	460	9x8	5	430
450	510	9x8	5	480
500	570	9x12	5	535
560	630	9x12	5	595
630	710	9x12	5	670

Możliwe wykonania: średnic do D1 = 1500 mm *

Owiercanie jako usługa dodatkowa.

Kołnierze pod wentylatory są wykonywane z płaskownika szerokości do 40 mm i grubości do 6 mm.